

TECHNICAL DATA

BASIC DATA

Rated voltage	12	V
20hr capacity at end voltage 1,75V/cell at 25°C	40	Ah
Internal resistance (fully charged battery) at 25°C	7,5	mΩ

DIMENSIONS

Length	199(±1)	mm
Width	166(±1)	mm
Height	171(±1)	mm
(Height with terminals)	171(±1)	mm
Weight	13,4	kg

TERMINALS

INSERT TERMINAL	M6	mm
-----------------	----	----

OPERATION TEMPERATURE RANGE

Storage	-20°C to +40°C	
Charge	-20°C to +40°C	
Discharge	-20°C to +50°C	

STORAGE

Selfdischarge after 3 months at 20°C	6	%
Selfdischarge after 6 months at 20°C	15	%
Selfdischarge after 12 months at 20°C	37	%

CASE MATERIAL

Standard	ABS (UL.94:HB)
Flame retardant	ABS (UL94:V0)

CHARGE VOLTAGE

Float charge at 25°C	13,65 V ± 0,18 V
Cycle charge at 25°C	14,70 V ± 0,30 V

CHARGE CURRENT

Recommended	4,0	A
Maximum	12,0	A

MAX. DISCHARGE CURRENT

5 sec.	480	A
--------	-----	---

DESIGNED LIFE

Bpower designed life at 25°C	up to 8	years
At 20°C according to Eurobat - General Purpose group	10 - 12	years

CYCLE LIFE

At 100% D.O.D.	250	cycles
At 50% D.O.D.	600	cycles

PHOTO



APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Telecommunication PABX
- Cash registers and fiscal printers
- Emergency lighting systems
- Emergency and fire systems
- Measure and mobile equipment
- Lawn mowers and electric bikes
- Toys

SAFETY



• Constant current (Current [A], 25 [°C])


F.V. V/cell	Discharge time											
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h	
1,85	113	95,0	69,0	42,9	29,7	16,8	11,3	8,75	7,28	3,91	2,03	
1,80	121	101	73,5	44,7	30,2	16,9	11,4	8,84	7,39	3,96	2,06	
1,75	126	104	79,1	46,6	30,9	17,0	11,6	9,03	7,50	4,01	2,12	
1,70	127	106	80,0	47,0	31,3	17,1	11,7	9,13	7,54	4,03	2,13	
1,65	130	107	82,0	47,9	32,2	17,3	11,9	9,32	7,58	4,05	2,15	
1,60	133	108	82,9	48,5	32,8	17,4	12,1	9,37	7,64	4,08	2,15	

• Constant power (Power [W/cell], 25 [°C])


F.V. V/cell	Discharge time											
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h	
1,85	204	166	134	83,9	54,8	32,5	22,8	17,3	14,4	6,86	3,51	
1,80	215	178	140	87,0	55,7	32,8	23,0	17,6	15,0	7,05	3,70	
1,75	227	196	147	90,8	56,8	33,6	23,4	17,9	15,2	7,27	3,89	
1,70	230	198	149	92,0	58,0	33,8	23,6	18,3	15,3	7,40	4,01	
1,65	235	203	153	93,8	60,0	34,1	23,9	18,6	15,4	7,57	4,19	
1,60	237	205	154	94,5	60,8	34,3	24,1	19,0	15,5	7,74	4,30	

F.V. - Final Voltage


DIMENSIONS/TERMINALS

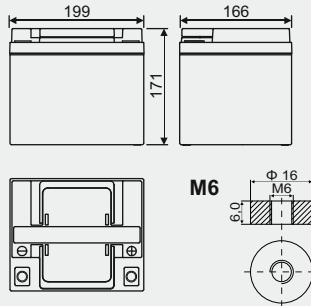


DISCHARGE CHARACTERISTICS

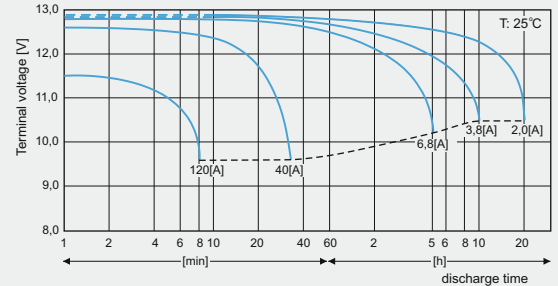


CHARGE CHARACTERISTICS

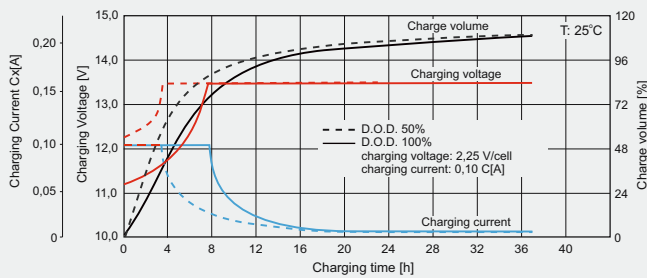


FLOAT LIFE

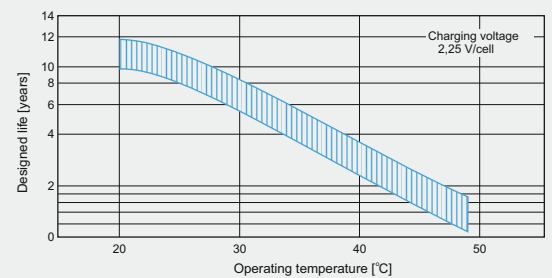


CYCLIC LIFE

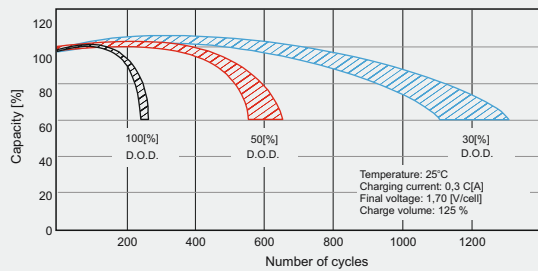

CAPACITY VS. TEMPERATURE

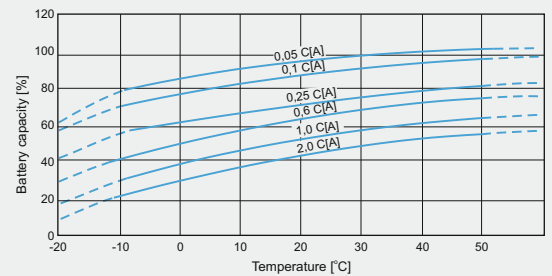

SELFDISCHARGE CHARACTERISTICS

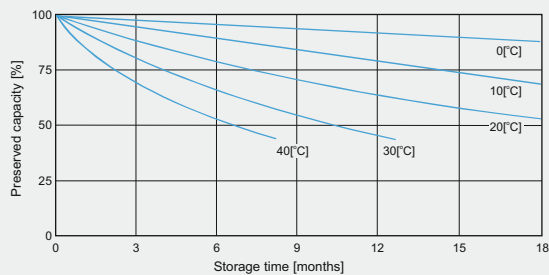

ENVIRONMENTAL INFORMATION

EXPLOITED BATTERIES ARE CONSIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIRONMENT AND HUMAN OR ANIMAL HEALTH AND LIFE.