# BPOWER YB14L-A2 14Ah 175A

BPOWER CLASSIC series batteries are classic batteries made with the utmost care. To maintain factory freshness of batteries they are available in a dry version with an electrolyte attached. The launch takes place shortly before installing the battery. Filled with electrolyte the battery becomes ready for use. Periodically you should check the electrolyte level because CLASSIC batteries are not completely structurally sound tight.

| BASIC PARAMETERS | | TECHNOLOGY | |
|---|---|---|---|
| Nominal voltage (V) | 12 | Technology | CA/CA |
| Nominal capacity C10 (Ah) | 14 | Separator | Envelope |
| Cold cranking amperage | 175 | | |
| **PHYSICAL PARAMETERS** | | **CHARGING PARAMETERS (25°C)** | |
| Dimensions (L x W x H) | 134 x 89 x 166 mm | Charging voltage | 14,0V - 14,4V |
| Weight (kg) | 4,58 | Recommended max. charging current | 1.4A |
| Terminal type | 8 | | |

## Terminal type

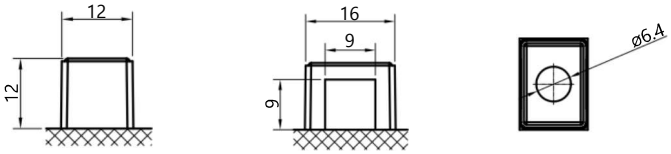


Front view Side view Top view

## Cell layout




0

## Dimensions

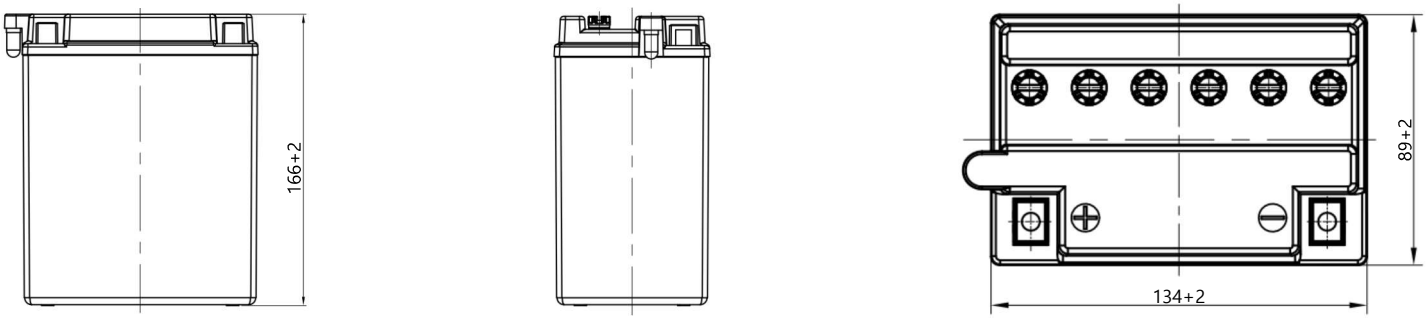


**Headquarters in Warsaw**
Jana Kazimierza 61
01-267 Warszawa

**Branch in Gdansk**
Twarda 12
80-871 Gdańsk

+48 22 877 54 96
biuro@baterie.com.pl
www.baterie.com.pl

BATERIE PRZEMYSŁOWE

The date of issue of catalog card: 02/2024