




BPOWER 629 AGM 180Ah 1100A

BASIC PARAMETERS		TECHNOLOGY	
Nominal voltage (V)	12	Technology	Ca/Ca VRLA
Nominal capacity 20HR (Ah)	180	Performance marking	W5 - C2 - V4 - E3
Cold cranking perform. (EN -18°C)	1100	Electrolyte density in 25°C	1.28 ± 0.01g/cm ³
Recom. charging current	18A	Separator	AGM
		Flame arrestor	✓
		Temperature Range	- 20°C ~ 55°C
PHYSICAL PARAMETERS		CASE FEATURES	
Dimensions (L x W x H)	512 x 222 x 216 mm	Case type	B DIN AGM
Weight (kg)	50,50	Hold down	N
Terminal type	T1	Handles	✓
Case material	Polipropylen PP	Cell layout	3
		Lid type	VRLA


Terminal type

T1



Cell layout

3

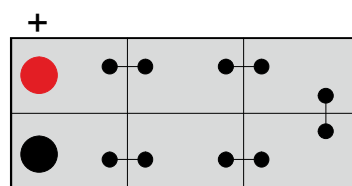

Battery hold down

N



Cycle life

Long cycle service life, strong recovery ability of deep discharge. Thank to the addition of special carbon material to formula the battery has higher charge acceptance.



High performance

High energy, low internal resistance, low self-discharge, no noise, easy to operate.



Efficiency & Maintenance

High efficiency at depth discharge cycles and high starting performance. BPOWER AGM series batteries has ability of continuous high current discharge.



Wide temperature range

Thanks to unique technology it has excellent discharge performance at low temperature and high corrosion resistance of plates in high temperature.



Tight construction

Reliable sealing structure ensures no leakage during use.



Vibration resistance

Excellent vibration resistance – EN V4. Use of thick lead parts for construction.

Headquarters in Warsaw
Jana Kazimierza 61
01-267 Warszawa

Branch in Gdansk
Twarda 12
80-871 Gdańsk

+48 22 877 54 96
biuro@baterie.com.pl
www.baterie.com.pl

BP BATERIE
PRZEMYSŁOWE